




## PRODUCT HIGHLIGHTS

- Rounded edge construction
- Easily zips down from conductor
- Dual zip construction between each web
- Multiple gauges available to meet your specific needs
- Wide range of conductor sizes available
- UL Listing: 2651
- UL Voltage Rating: 300V
- UL Temp: 105° C

**Physical construction description:** Flat planar cable using 24 or 26 AWG stranded tinned topcoated copper, extruded in PVC on .100" centers. Conductor number one is marked with a polarity stripe. Standard cable color is gray

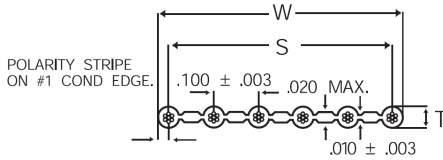

	26 AWG	24 AWG
Series #	20028	20027
Conductor	26 AWG (7/34) Tinned Topcoated	24 AWG (7/32) Tinned Topcoated
Insulation	PVC	PVC
Conductor Resistance Ω/1000' Nom. @ 20°C	43.9	26.5
Capacitance pF/ft.	12	13
Impedance G-S-G Ω's	150	130
Propagation Delay ns/ft.	1.35	1.35
Pitch Tolerance	± 0.003"	± 0.003"
Thickness (T)	0.039 ± .002"	0.044 ± .002"
Width (W)	(S)pan + 0.045"	(S)pan + 0.050"
Standard Put-ups (Feet)	100 & 500	100 & 500
Polarity Stripe Color	Blue	Black

No. of Cond.	Span "S"	26 AWG		24 AWG	
		Configuration	Part. No.	Configuration	Part. No.
5	0.400 ± 0.007"	A2607-62-05TTC	20028-005	A2407-62-05TTC	20027-005
6	0.500 ± 0.007"	A2607-62-06TTC	20028-006	A2407-62-06TTC	20027-006
7	0.600 ± 0.007"	A2607-62-07TTC	20028-007	A2407-62-07TTC	20027-007
8	0.700 ± 0.007"	A2607-62-08TTC	20028-008	A2407-62-08TTC	20027-008
9	0.800 ± 0.007"	A2607-62-09TTC	20028-009	A2407-62-09TTC	20027-009
10	0.900 ± 0.007"	A2607-62-10TTC	20028-010	A2407-62-10TTC	20027-010
11	1.000 ± 0.009"	A2607-62-11TTC	20028-011	A2407-62-11TTC	20027-011
12	1.100 ± 0.009"	A2607-62-12TTC	20028-012	A2407-62-12TTC	20027-012
13	1.200 ± 0.009"	A2607-62-13TTC	20028-013	A2407-62-13TTC	20027-013
14	1.300 ± 0.009"	A2607-62-14TTC	20028-014	A2407-62-14TTC	20027-014
15	1.400 ± 0.009"	A2607-62-15TTC	20028-015	A2407-62-15TTC	20027-015
16	1.500 ± 0.009"	A2607-62-16TTC	20028-016	A2407-62-16TTC	20027-016
17	1.600 ± 0.009"	A2607-62-17TTC	20028-017	A2407-62-17TTC	20027-017
18	1.700 ± 0.009"	A2607-62-18TTC	20028-018	A2407-62-18TTC	20027-018
19	1.800 ± 0.009"	A2607-62-19TTC	20028-019	A2407-62-19TTC	20027-019
20	1.900 ± 0.009"	A2607-62-20TTC	20028-020	A2407-62-20TTC	20027-020
21	2.000 ± 0.011"	A2607-62-21TTC	20028-021	A2407-62-21TTC	20027-021
22	2.100 ± 0.011"	A2607-62-22TTC	20028-022	A2407-62-22TTC	20027-022
23	2.200 ± 0.011"	A2607-62-23TTC	20028-023	A2407-62-23TTC	20027-023
24	2.300 ± 0.011"	A2607-62-24TTC	20028-024	A2407-62-24TTC	20027-024
25	2.400 ± 0.011"	A2607-62-25TTC	20028-025	A2407-62-25TTC	20027-025
26	2.500 ± 0.011"	A2607-62-26TTC	20028-026	A2407-62-26TTC	20027-026
27	2.600 ± 0.011"	A2607-62-27TTC	20028-027	A2407-62-27TTC	20027-027
28	2.700 ± 0.011"	A2607-62-28TTC	20028-028	A2407-62-28TTC	20027-028

