




PRODUCT HIGHLIGHTS

- Rounded edge construction
- Dual zip construction between each web
- Multiple gauges available to meet your specific needs
- Wide range of conductor sizes available
- UL Listing: 2651
- UL Voltage Rating: 300V
- UL Temp: 105° C

Physical construction description: Flat planar cable using 22, 24, or 26 AWG stranded tinned copper, extruded in PVC on .100" centers. Conductor number one is marked with a polarity stripe. Standard cable color is gray

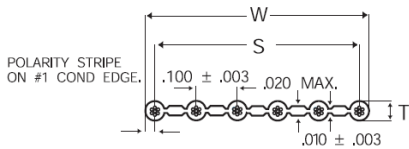

	26 AWG	24 AWG	22 AWG
Series #	23232	23224	23225
Conductor	26 AWG (7/34) Tinned	24 AWG (7/32) Tinned	22 AWG (7/30) Tinned
Insulation	PVC	PVC	PVC
Conductor Resistance Ω/1000' Nom. @ 20°C	43.1	25.7	15.0
Capacitance pF/ft.	12	13	12
Impedance G-S-G Ω's	150	130	115
Propagation Delay ns/ft.	1.35	1.35	1.35
Pitch Tolerance	± 0.003"	± 0.003"	± 0.003"
Thickness (T)	0.039 ± .002"	0.044 ± .002"	0.050 ± .003"
Width (W)	(S)pan + 0.045"	(S)pan + 0.050"	(S)pan + 0.056"
Polarity Stripe Color	Blue	Black	Red

No. of Cond.	Span "S"	26 AWG		24 AWG		22 AWG	
		Configuration	Part. No.	Configuration	Part. No.	Configuration	Part. No.
6	0.500 ± 0.007"	A2607-62-06T	23232-006	A2407-62-06T	23224-006	-	-
7	0.600 ± 0.007"	-	-	A2407-62-07T	23224-007	A2207-62-07T	23225-007
8	0.700 ± 0.007"	A2607-62-08T	23232-008	A2407-62-08T	23224-008	-	-
10	0.900 ± 0.007"	A2607-62-10T	23232-010	-	-	-	-
11	1.000 ± 0.009"	A2607-62-11T	23232-011	-	-	-	-
12	1.100 ± 0.009"	A2607-62-12T	23232-012	A2407-62-12T	23224-012	-	-
14	1.300 ± 0.009"	-	-	-	-	A2207-62-14T	23225-014
15	1.400 ± 0.009"	-	-	A2407-62-15T	23224-015	-	-
16	1.500 ± 0.009"	-	-	-	-	A2207-62-16T	23225-016
18	1.700 ± 0.009"	A2607-62-18T	23232-018	-	-	-	-
20	1.900 ± 0.009"	-	-	-	-	A2207-62-20T	23225-020
28	2.700 ± 0.011"	A2607-62-28T	23232-028	-	-	-	-

