




PRODUCT HIGHLIGHTS

- Rounded edge construction
- Dual zip construction between each web
- Multiple gauges available to meet your specific needs
- Wide range of conductor sizes available
- UL Listing: 2651
- UL Voltage Rating: 300V
- UL Temp: 105° C

Physical construction description: Flat planar cable using 22, 24, or 26 AWG stranded tinned copper, extruded in PVC on .100" centers. Conductor number one is marked with a polarity stripe. Standard cable color is gray.

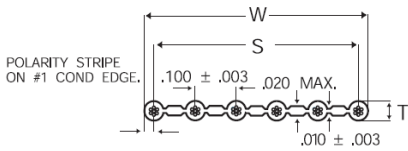

| | 26 AWG | 24 AWG | 22 AWG |
|---|-------------------------|-------------------------|-------------------------|
| Series # | 23232 | 23224 | 23225 |
| Conductor | 26 AWG (7/34) Tinned | 24 AWG (7/32) Tinned | 22 AWG (7/30) Tinned |
| Insulation | PVC | PVC | PVC |
| Conductor Resistance Ω/1000' Nom. @ 20°C | 43.1 | 25.7 | 15.0 |
| Capacitance pF/ft. | 12 | 13 | 12 |
| Impedance G-S-G Ω's | 150 | 130 | 115 |
| Propagation Delay ns/ft. | 1.35 | 1.35 | 1.35 |
| Pitch Tolerance | ± 0.003" | ± 0.003" | ± 0.003" |
| Thickness (T) | 0.039 ± .002" | 0.044 ± .002" | 0.050 ± .003" |
| Width (W) | (S)pan + 0.045" | (S)pan + 0.050" | (S)pan + 0.056" |
| Polarity Stripe Color | Blue | Black | Red |

| No. of Cond. | Span "S" | 26 AWG | | 24 AWG | | 22 AWG | |
|--------------|----------------|---------------|-----------|---------------|-----------|---------------|-----------|
| | | Configuration | Part. No. | Configuration | Part. No. | Configuration | Part. No. |
| 6 | 0.500 ± 0.007" | A2607-62-06T | 23232-006 | A2407-62-06T | 23224-006 | - | - |
| 7 | 0.600 ± 0.007" | - | - | A2407-62-07T | 23224-007 | A2207-62-07T | 23225-007 |
| 8 | 0.700 ± 0.007" | A2607-62-08T | 23232-008 | A2407-62-08T | 23224-008 | - | - |
| 10 | 0.900 ± 0.007" | A2607-62-10T | 23232-010 | - | - | - | - |
| 11 | 1.000 ± 0.009" | A2607-62-11T | 23232-011 | - | - | - | - |
| 12 | 1.100 ± 0.009" | A2607-62-12T | 23232-012 | A2407-62-12T | 23224-012 | - | - |
| 14 | 1.300 ± 0.009" | - | - | - | - | A2207-62-14T | 23225-014 |
| 15 | 1.400 ± 0.009" | - | - | A2407-62-15T | 23224-015 | - | - |
| 16 | 1.500 ± 0.009" | - | - | - | - | A2207-62-16T | 23225-016 |
| 18 | 1.700 ± 0.009" | A2607-62-18T | 23232-018 | - | - | - | - |
| 20 | 1.900 ± 0.009" | - | - | - | - | A2207-62-20T | 23225-020 |
| 28 | 2.700 ± 0.011" | A2607-62-28T | 23232-028 | - | - | - | - |

