

PRODUCT HIGHLIGHTS

- RoHS 3 compliant
- Made in U.S.A.
- Cable Rated for Outdoor Use
- Suitable for direct burial, lashed aerial, duct and underground conduit applications
- Tested from 1 to 660 MHz.
- Cable core is filled with non-conductive, water-blocking gel
- Rugged black polyolefin jacket
- UV resistant jacket

APPLICATIONS

- HDBase-T A & B (Cat 6)
- 5 Gigabit Ethernet (IEEE 802.3bz)(Cat 6)
- 2.5 Gigabit Ethernet (IEEE 802.3bz)
- Gigabit Ethernet (IEEE 802.3ab)
- 100 Mbps Ethernet (IEEE 802.3u)
- 1000 Mbps ATM
- 622 Mbps ATM
- 15W PoE (IEEE 802.3af)
- 30W PoE+ (IEEE 802.3at)
- 60W PoE++ (IEEE 802.3bt Type 3)
- 100W PoE++ (IEEE 802.3bt Type 4)

PACKAGING

- 1,000 foot (305 m) reels
- Reverse sequential footage markings standard on each 1,000 foot package
- Unit/pallet: 12 Reels

*weight may vary

TEMPERATURE RANGE

- **Storage Temperature**
-40°C to +70°C
(-40°F to +158°F)
- **Installation Temperature**
-20°C to +70°C
(-4°F to +158°F)
- **Operation Temperature**
-40°C to +70°C
(-40°F to +158°F)

Cat 6 Outside Plant UTP Part Specifications

| | Part Number | # of Pairs | Calculated Cable O.D. | | Cable Weight | | c(UL) us Listed Type |
|--------------------|-------------|------------|-----------------------|-------|--------------|----------|----------------------|
| | | | inches | mm | lbs/1000ft | kg/305 m | |
| OUTDOOR UTP | 30180-8-XXY | 4 | 0.270 | 6.858 | 34.65 | 15.72 | PO, CSA Type FT6 |

Building a Part Number

| Base Part Number Ex. | No. of Conductors | Jacket Color | Reel Type |
|----------------------|-------------------|--------------|-----------|
| 30180 | 8 | XX | Y |

Jacket Colors (XX):



Reel Type (Y):




Reel 3: Reel

Primary Insulation



24 AWG
Bare Copper

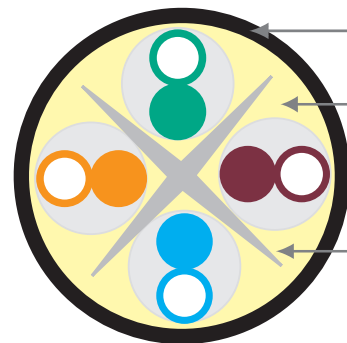

Rugged Polyolefin
Overall Jacket

Non-conductive,
water-blocking gel

Star Filler

DIELECTRIC MATERIALS

Outdoor UTP Cables

Overall Jacket: Medium density polyolefin

Cat 6 Outside Plant UTP Transmission Specifications

ANSI/TIA-568.2-D Category 6 Verified
ISO/IEC 11801, 2nd ed. Class EA Compliant

| Freq. (MHz) | Ins. Loss | | NEXT | | PSNEXT | | ACR | | PSACR | | ACRF | | PSACRF | | Return Loss | |
|-------------|-----------|------|------|------|--------|------|------|------|-------|------|------|------|--------|------|-------------|------|
| | Std. | Max. | Std. | Min. | Std. | Min. | Cal. | Min. | Cal. | Min. | Std. | Min. | Std. | Min. | Std. | Min. |
| 1 | 2.0 | 2.0 | 74.3 | 74.3 | 72.3 | 72.3 | 72.3 | 72.3 | 70.3 | 70.3 | 67.8 | 67.8 | 64.8 | 64.8 | 20.0 | 20.0 |
| 4 | 3.8 | 3.8 | 65.3 | 65.3 | 63.3 | 63.3 | 61.5 | 61.5 | 59.5 | 59.5 | 55.8 | 55.8 | 52.8 | 52.8 | 23.0 | 23.0 |
| 8 | 5.3 | 5.3 | 60.8 | 60.8 | 58.8 | 58.8 | 55.4 | 55.4 | 53.4 | 53.4 | 49.7 | 49.7 | 46.7 | 46.7 | 24.5 | 24.5 |
| 10 | 6.0 | 6.0 | 59.3 | 59.3 | 57.3 | 57.3 | 53.3 | 53.3 | 51.3 | 51.3 | 47.8 | 47.8 | 44.8 | 44.8 | 25.0 | 25.0 |
| 16 | 7.6 | 7.6 | 56.2 | 56.2 | 54.2 | 54.2 | 48.7 | 48.7 | 46.7 | 46.7 | 43.7 | 43.7 | 40.7 | 40.7 | 25.0 | 25.0 |
| 31.25 | 10.7 | 10.7 | 51.9 | 51.9 | 49.9 | 49.9 | 41.2 | 41.2 | 39.2 | 39.2 | 37.9 | 37.9 | 34.9 | 34.9 | 23.6 | 23.6 |
| 62.5 | 15.4 | 15.4 | 47.4 | 47.4 | 45.4 | 45.4 | 32.0 | 32.0 | 30.0 | 30.0 | 31.9 | 31.9 | 28.9 | 28.9 | 21.5 | 21.5 |
| 100 | 19.8 | 19.8 | 44.3 | 44.3 | 42.3 | 42.3 | 24.5 | 24.5 | 22.5 | 22.5 | 27.8 | 27.8 | 24.8 | 24.8 | 20.1 | 20.1 |
| 155 | 25.2 | 25.2 | 41.1 | 41.1 | 39.4 | 39.4 | 16.3 | 16.3 | 14.3 | 14.3 | 24.0 | 24.0 | 21.0 | 21.0 | 18.8 | 18.8 |
| 200 | 29.0 | 29.0 | 39.8 | 39.8 | 37.8 | 37.8 | 10.8 | 10.8 | 8.8 | 8.8 | 21.8 | 21.8 | 18.8 | 18.8 | 18.0 | 18.0 |
| 250 | 32.8 | 32.8 | 38.3 | 38.3 | 36.3 | 36.3 | 5.5 | 5.5 | 3.5 | 3.5 | 19.8 | 19.8 | 16.8 | 16.8 | 17.3 | 17.3 |
| 350* | - | 39.8 | - | 36.1 | - | 34.1 | - | - | - | - | 16.9 | - | 13.9 | - | 16.3 | - |
| 555* | - | 52.0 | - | 33.1 | - | 31.1 | - | - | - | - | 12.9 | - | 9.9 | - | 14.9 | - |
| 660* | - | 57.7 | - | 32.0 | - | 30.0 | - | - | - | - | 11.4 | - | 8.4 | - | 14.4 | - |

All values are dB/100m.

ELECTRICAL CHARACTERISTICS

| | |
|--|--|
| Input Impedence: | 100 ± 15Ω (1.0 to 100 MHz) 100 ± 15Ω (101 to 250 MHz) |
| Maximum Resistance Unbalance: | 5% |
| Maximum Capacitance Unbalance: | 330 pF/100 meters |
| Maximum Delay Skew: | 45 ns/100 meters |
| Nominal Velocity Of Propagation (Nvp): | 67% |
| Voltage Rating: | 300 Volts |

CABLE AMPACITY CHART

| Bundle Size | 1 | 2-7 | 8-19 | 20-37 | 38-61 | 62-91 | 92-192 |
|-------------|------|------|------|-------|-------|-------|--------|
| Cable Temp | 60°C | 60°C | 60°C | 60°C | 60°C | 60°C | 60°C |
| 24 AWG | 2.5 | 1.0 | 0.8 | 0.6 | 0.5 | 0.5 | 0.3 |

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

Proterial Cable America, Inc. is continuously improving the performance of our products and the accuracy of the information provided. Due to this, we reserve the right to modify, revise, correct, or change products without notice. Thank you for your understanding.

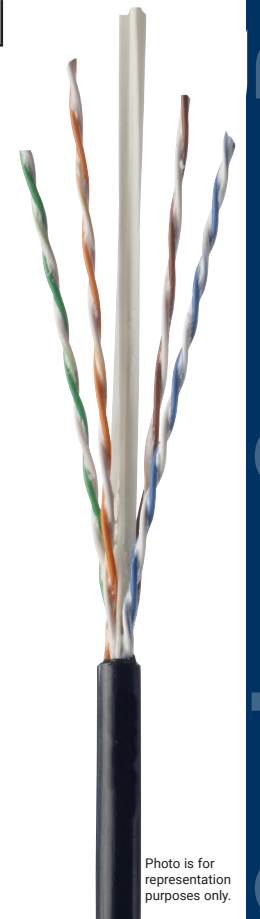


Photo is for representation purposes only.

